

Inserta Products, Inc.

BALL VALVE TWIN LOCK PLATE



The **INSERTA® Twin Lock Plate** may be considered for those applications where minimizing potential movement of the valve stem in the locked position, using a variety of lock shackle lengths, is desirable. The method of stem locking is different than the 'L' and 'U' style lock plates.


The upper locking plate has two vertical tabs, each with an aperture. One upper locking plate tab is brought into alignment with the stationary tab fixed to the valve body when the valve is fully opened, while the other is brought into alignment when the valve is fully closed.

The valve stem may be locked in either position. The method of stem locking is different than the 'L' and 'U' style lock plates.

The twin lock plate is steel construction.

Inserta Products, Inc.
Blue Bell, Pa. 19422

TWIN LOCK PLATE

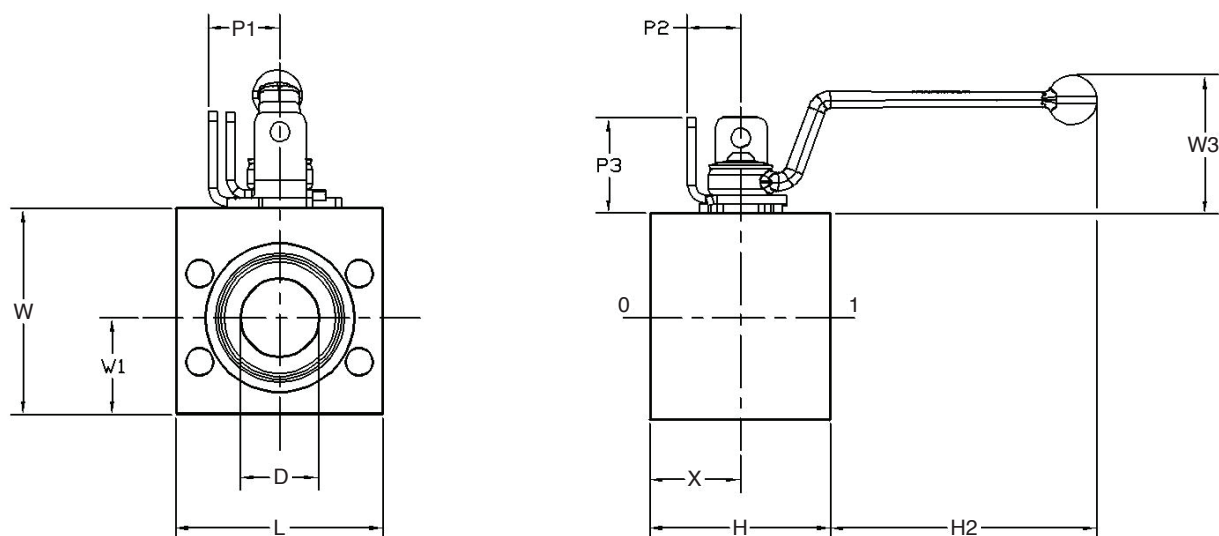

CODE 61

PATTERN SIZE	NOMINAL SIZE	D	L	W	H	X	W1	H2	W3	P1	P2	P3
6112	3/4	0.75	2.50	2.25	2.00	0.94	1.50	5.77	2.57	1.24	0.84	1.88
6116	1	0.75	2.75	2.50	2.00	1.01	1.48	5.84	2.57	1.24	0.84	1.88
6120	1 1/4	1.00	3.00	2.75	2.25	1.13	1.60	5.71	2.57	1.24	0.84	1.88
6124	1 1/2	1.25	3.75	3.50	2.75	1.42	1.88	7.31	2.60	1.38	1.01	1.88
6132	2	1.50	4.00	4.00	3.50	1.75	2.12	6.90	2.60	1.38	1.01	1.88
6140	2 1/2	2.00	4.50	4.50	4.00	2.06	2.38	6.71	2.60	1.38	1.01	1.88
6148	3	2.25	5.25	5.00	4.50	2.17	2.91	6.32	2.60	1.38	1.01	1.88

CODE 62

PATTERN SIZE	NOMINAL SIZE	D	L	W	H	X	W1	H2	W3	P1	P2	P3
6212	3/4	0.75	2.75	2.50	2.00	0.94	1.50	5.77	2.57	1.24	0.84	1.88
6216	1	0.75	3.00	2.75	2.00	1.03	1.60	5.84	2.57	1.24	0.84	1.88
6220	1 1/4	1.00	3.50	2.75	2.25	1.13	1.85	5.71	2.57	1.24	0.84	1.88
6224	1 1/2	1.25	4.25	3.75	2.75	1.42	2.13	7.31	2.60	1.38	1.01	1.88
6232	2	1.50	5.00	4.38	3.50	1.75	2.63	6.90	2.60	1.38	1.01	1.88
6240	2 1/2	2.00	6.00	4.75	4.00	2.06	3.56	6.71	2.60	1.38	1.01	1.88
6248	3	2.25	8.00	5.25	4.50	2.17	4.31	6.32	2.60	1.38	1.01	1.88

Inserta Products, Inc.
Blue Bell, Pa. 19422

TWIN LOCK PLATE